



# Flex Blade® Window Instructions



Remove the pieces of the Flex Blade® Window from carrying case careful to keep the flag from getting dirty.

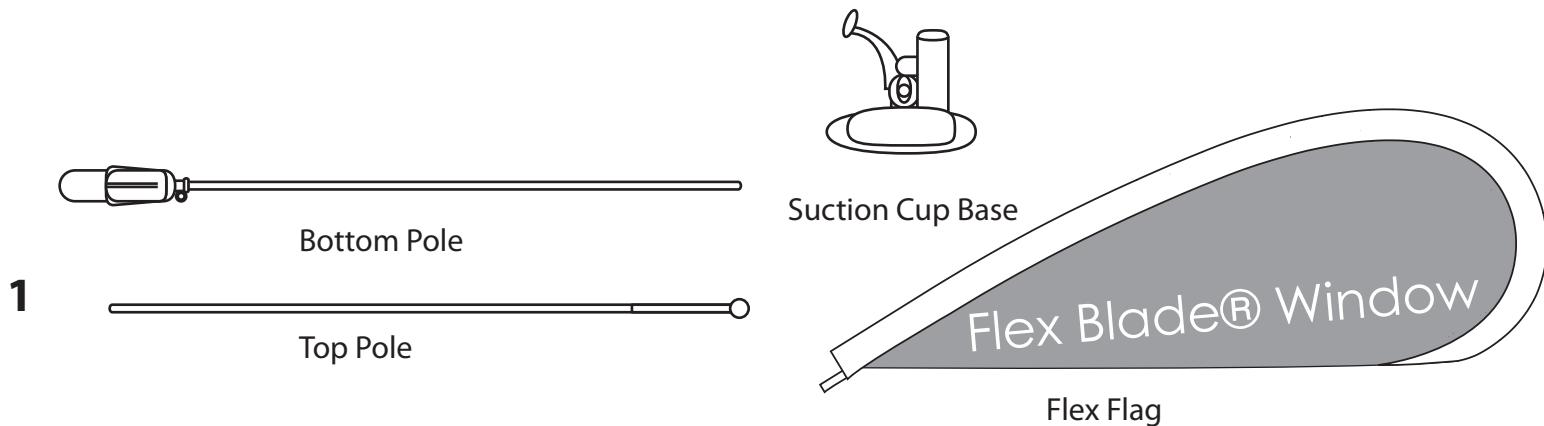


Fit the top pole onto the bottom pole.

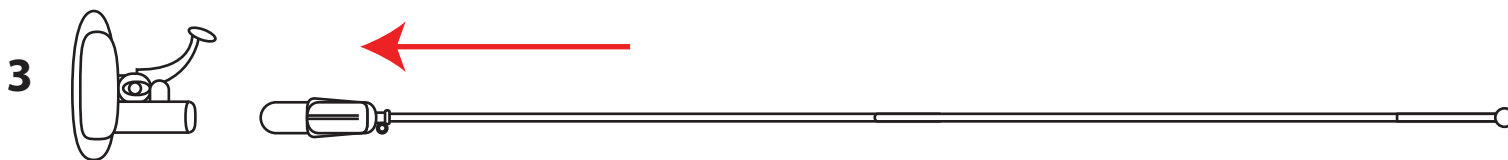

Fit the combined poles into the suction cup base.



Fit the combined poles into the suction cup base.

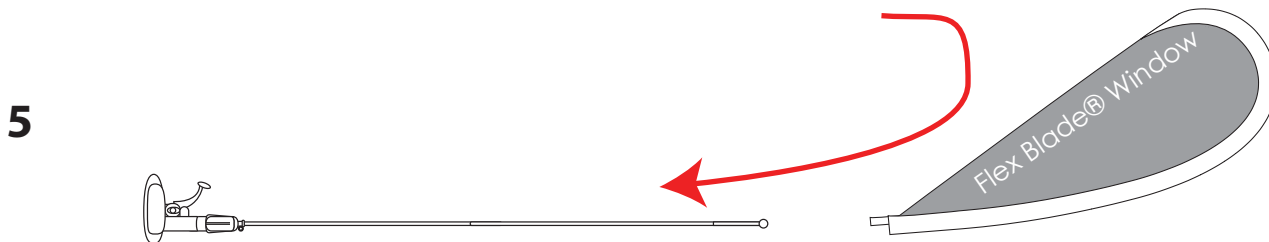


Gently slip the Flex Flag onto the pole through the black sleeve, careful not to pierce the flag. There should be a slight bend in the pole as the flag is pulled taut.

# Flex Blade® Window Instructions

---

---

6

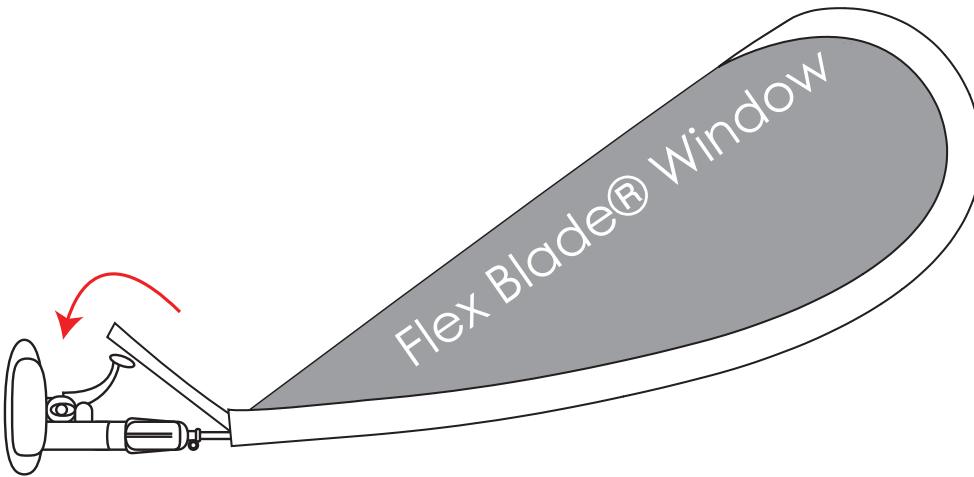


---

---

Slip the securing strap under the suction cup base lever and pull the lever arm down locking the flag taut.

7

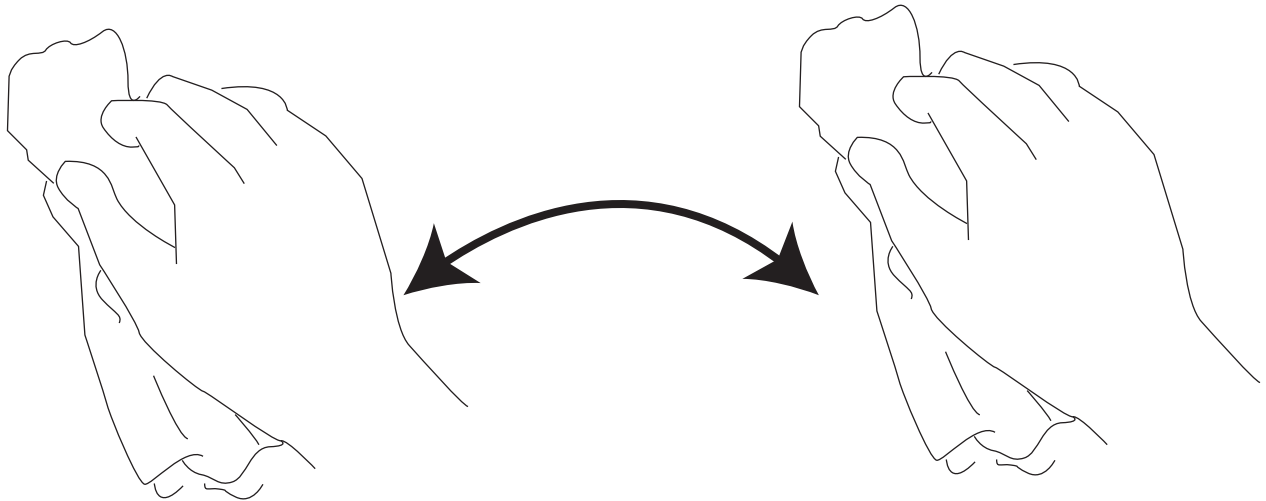


---

---

Thoroughly clean window surface with a household cleaner to remove any soap film or residue. Rinse thoroughly and allow to dry completely. Be certain that you clean the entire area where the suction cup will be attached.

8

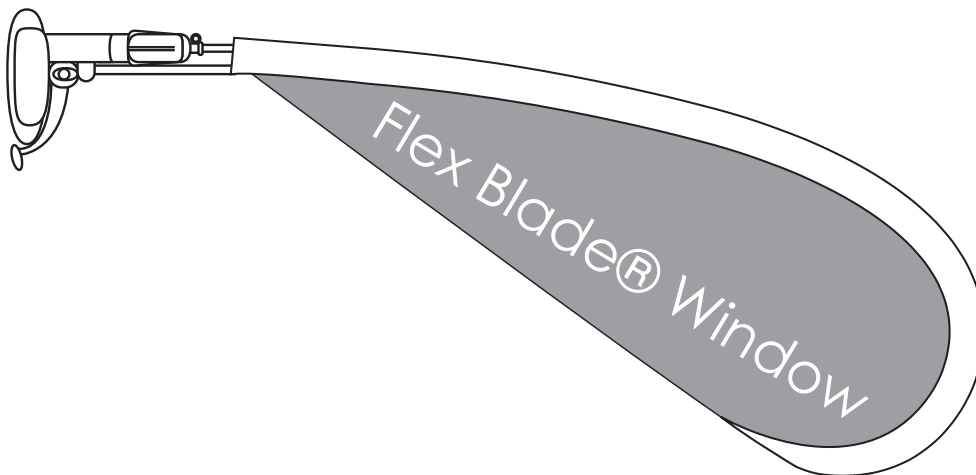

Press the suction cup firmly against the window surface till the suction up firmly holds the flag outward and enjoy your new Flex Blade Window Flag!